


3804 RELAY CARD

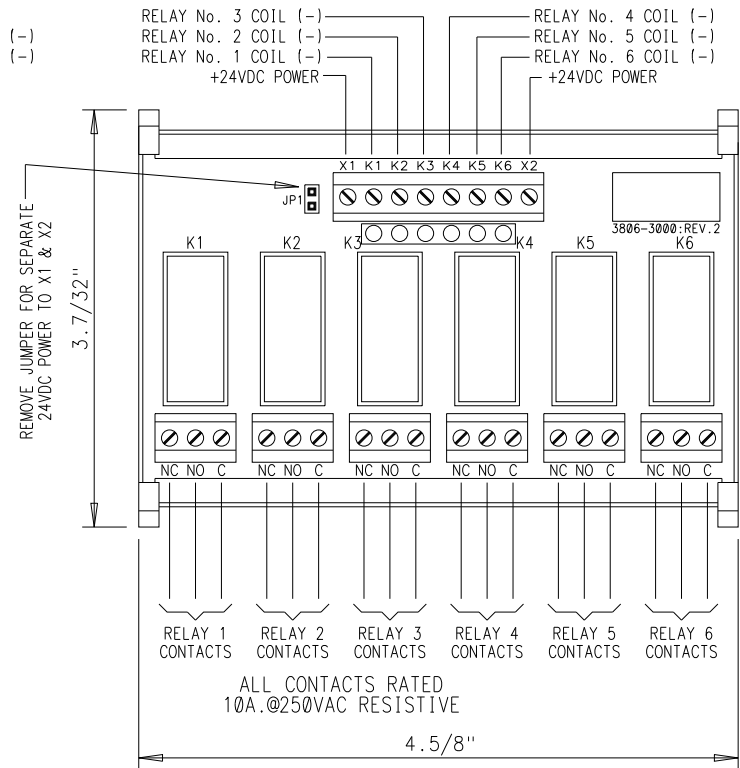

3806 RELAY CARD

NOTES

1. RELAYS ARE PLUG-IN TYPE WITH 24VDC COILS @ 22mA CURRENT DRAW
2. CIRCUIT BOARDS ARE EQUIPPED WITH COIL SUPPRESSION DIODES
3. FACTORY JUMPER CAN BE REMOVED FOR MULTIPLE SOURCE POWER
4. RELAYS ARE ACTIVATED BY CONNECTING COIL WIRE TO VOLTAGE COMMON
5. RELAY CARDS WILL MOUNT ON 35mm DIN RAIL

7  
5  
2

REV.	DATE	DESCRIPTION
2	05/10/08	REVISED RELAY MOUNTINGS
1	03/29/95	ADDED NEW RELAY BASE & REVISED 4 SPDT UNIT

THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF ESSEX ENGINEERING CORP. IT SHALL NOT BE DUPLICATED, REPRODUCED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF ESSEX ENGINEERING CORP.

OUTLINE DRAWING & SCHEMATIC  
for  
RELAY INTERFACE MODULES  
4 SPDT; 6 SPDT / 24VDC RELAYS

<b>ESSEX ENGINEERING CORPORATION</b> 21 INDUSTRIAL DRIVE - IVYLAND, PENNSYLVANIA 18974 - (215)322-5880				
DWG. BY WAS	CK. BY	REV. BY	DWG. NO. 3804-5000	REV. 2
DATE 11/29/90	APP. BY	SCALE NONE	SHEET 01 OF 01	